


# HAND SEALER

772DH

## ● CONNECTION DIAGRAM

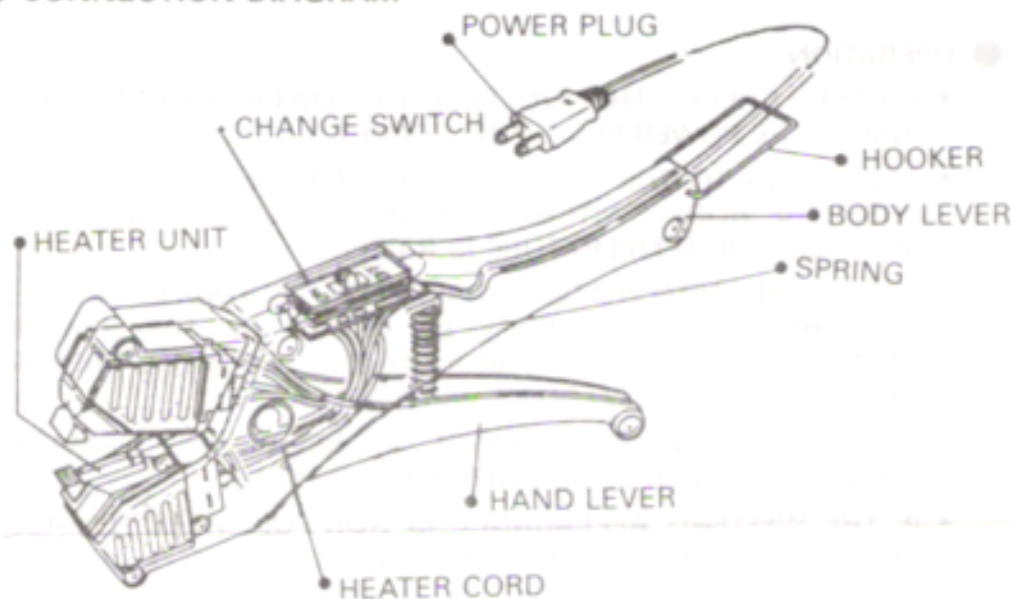

## ● USAGE

- TO WELD OPS, PSP, PVC, AND EPS FOOD. PACKING CASES FOR SHOPS, STORES, HOUSES, MILL, RESTAURANT, HOTEL.

## ● FEATURE

- LIGHT WEIGHT.
- EASY TO OPERATE.
- REGULATABLE IN HI OR LO TEMPERATURE SUITED TO ANY THICKNESS.
- DIRECT HEAT WELD, SOLD AND FIRM.

## ● SPECIFICATION

772DH

VOLTAGE	WATT	HEATER TEMP	DIMENSION	WEIGHT
110/220V	14.5W	LO 180°C HI 210°C	13X24X4CM	300g

## ● OPERATION

- PLEASE CHECK THE VOLTAGE OF POWER SOCKET, THEN INSERT THE POWER PLUG INTO SOCKET.
- ACCORDING TO THE THICKNESS OR VARIETY OF POLY-CASE, PUSH THE SLIDE SWITCH TO HI OR LO POSITION, AFTER 2-3 MINUTES, THE TEMPERATURE IS RAISED.
- WHILE THE TEMPERATURE RAISED TO SUITABLE DEGREE PUT THE POLY-CASE EDGE BE GRIPED BY THE HEATER UNIT OF THIS MACHINE THROUGH ONE SECOND, THEN A EXCELLENT AND SOLD POINT WELD APPEAR.
- IF THE WELDING APPEARANCE IS BREAK OR DAMAGE PLEASE REGULATE SLIDE SWITCH TO LO POINT.
- IF THE WELDING APPEARANCE IS NON-FULL-WELD, PLEASE REGULATE SLIDE SWITCH TO HI POINT.

## ● NOTE

- NEVER TOUCH TO HEATER UNIT FOR HIGH TEMPERATURE.
- NEVER STEEPED WITH WATER OR OTHER LIQUID.
- NEVER SHOCK OR DROP DOWN.
- NEVER GRIPED WITH NOTHING THE JAW OF HEATER UNIT FOR PROTECTING TEFLON COATING.
- KEEP THE JAW OF HEATER UNIT CLEANING CONSTANTLY.