

**THERMO SEALER**

The PackRite Continuous Hand Rotary Heat Sealer is designed for convenient, versatile sealing of bulky and unique packages. It was developed in response to some of the unusual sealing problems encountered by military, government and overseas packagers.

Because of the increased use of moisture-proof and vapor-proof enclosures, it is necessary to use a sealer that is applicable for both fabrication and closure. In addition to meeting these requirements, the Continuous Hand Rotary Sealer is portable, light in weight, and readily adaptable to on-the-job sealing of large items.

Just as important, the machine delivers a high quality, airtight seal


that meets MIL Specs. In fact, it is already being widely used by military packagers throughout the world.

With the Hand Rotary Sealer, an operator can seal over splices and thick overlaps with no problem. Materials commonly sealed include heavy laminates, foils and MIL Spec materials, as well as cellophane and polyethylene when used with over-cap labels. On lighter materials, a sealing speed of up to 400 inches per minute can be achieved.

Its portability makes the Hand Rotary Sealer one of the fastest, most easy-to-use heat sealers available. And, if portability isn't always required, the sealer can be mounted (with optional attachments) for hand-fed stationary operation.

**Two Sealing Impressions  
(1" Wide)**

**Model F, Flat Seal.** Many sealing applications require only a standard, flat, one-inch seal as delivered by the Model F Hand Rotary Sealer. If a grooved seal is required, an optional conversion kit is available to change a Model F into a Model G.

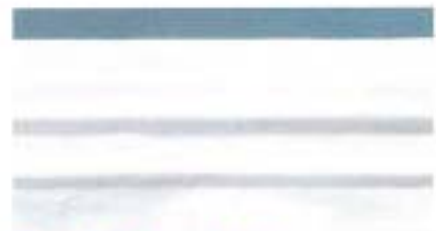

**Model G, Grooved Seal.** Where large enclosures are being fabricated, or where spliced material is being used, double-beaded "grooved" rolls can be furnished. On the Model G Sealer, one of the pre-heater bars is spring-loaded to bring both bars into contact with the material. This provides more heat and softening of folded-over material to improve seal strength and make tight seals over splices and overlaps.

See reverse side for complete list of specifications.

### THERMO SEALER


### SPECIFICATIONS

<b>Standard:</b>	Top-mounted handle. Adjustable thermostat.
<b>Sealing Speed:</b>	Up to 400 inches per minute on lighter materials.
<b>Sealing Capacity:</b>	Heavy MIL Spec material, heavy laminates and foils, plus cello- phane and polyethylene when used with overcap labels.
<b>Seal Impressions:</b>	Flat (Model F), Bead and Groove (Model G).
<b>Seal Width:</b>	1".
<b>Seal Length:</b>	Infinite (continuous).
<b>Temperature Range:</b>	Adjustable from 200° through 550°F.
<b>Electrical:</b>	115 Volts, 50/60 cycles, 1-phase AC. (Options available.)
<b>Shipping Weight:</b>	7 lbs.
<b>Shipping Dimensions:</b>	15"L x 6"W x 8"H.

- OPTIONS (Up charge)**
- Side-carrying handle for two-handed use.
  - Bag-sealing bracket for angle support when using pre-fabricated bags.
  - Bag-making bracket, mounts on back of a table so table surface can be used to move material through.
  - Conversion kit to change Model F (flat seal) Sealer into a Model G (grooved seal) Sealer.
  - Teflon\* coating on preheater bars and pressure rolls (Model F only).
  - Electrical: 230 Volts, 50/60 cycles, 1-phase AC.

**Form-Fit Handle** has kink eliminator and strain relief for rubber covered cord with plug.

**Pilot Light** indicates when desired sealing temperature has been reached.

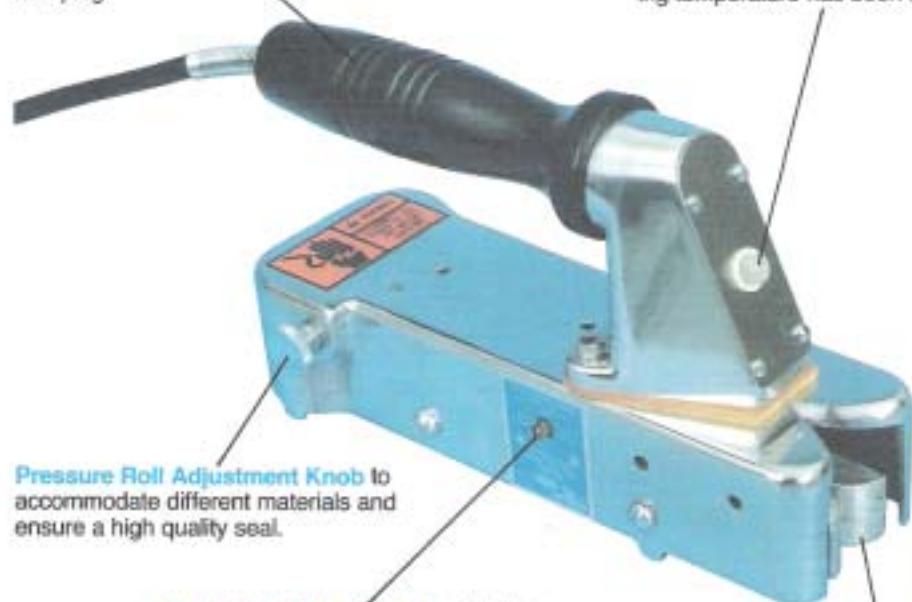

**Pressure Roll Adjustment Knob** to accommodate different materials and ensure a high quality seal.

**Adjustable Thermostat** controls temperature from 200° through 550°F.

**Rounded Sealing Entrance** facilitates feed of materials to help ensure a high quality seal with minimal effort.

**Other Features:**

- Frame casting, preheater bars, handle supports and rolls are all aluminum for light weight.
- Preheater bars (1" wide, 8½" long) each have a 150-Watt, sheathed heating element for a total of 300 Watts.
- Sealer rolls of 1½" diameter and 1" face run on ball bearings.
- All wiring is protected in the handle recess.

Molding Accesories • Packaging Machines  
**WEST COAST PLASTICS**  
**EQUIPMENT, INC.**  
 6122 W. Washington Blvd.  
 Culver City, CA 90232  
**323/870-7733 800/392-8569 Fax: 310/837-4947**